


## innovi Edge™ 320/325 Data Sheet (Ver. 07-June-2022)

innovi Edge™ 320/325 is a compact appliance with pre-loaded innovi software, connecting ONVIF / RTSP fixed IP cameras from the cameras network to innovi video analytics solution.

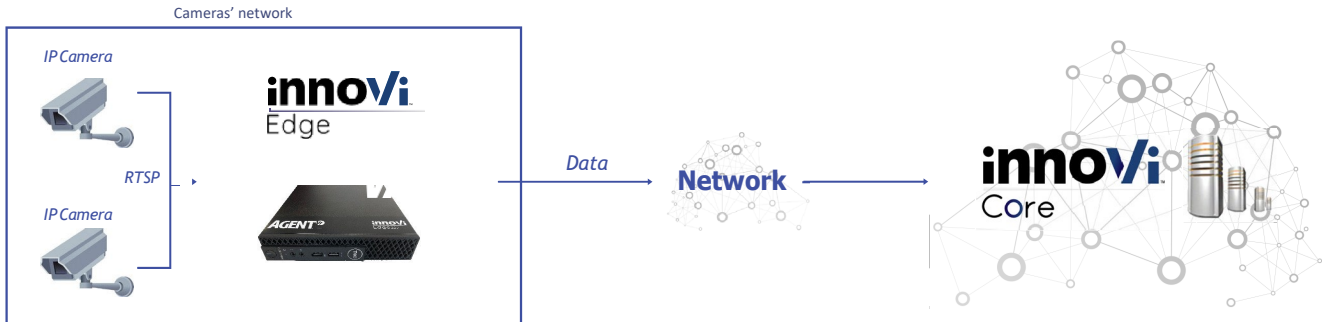

### innovi Edge 320/325 for innovi Remote Guarding

| Number of Supported Cameras   |  |                        |                      |                        |
|---|--|------------------------|----------------------|------------------------|
| Compression Format / Resolution / FPS   | H.264 / 720P / 8 FPS                     | H.264 / 1080P / 30 FPS | H.265 / 720P / 8 FPS | H.265 / 1080P / 30 FPS |
| <b>Number of Cameras</b>  | <b>14</b>                                | <b>4</b>               | <b>11</b>            | <b>4</b>               |
| <ul style="list-style-type: none"> <li>The number of supported cameras for a given hardware configuration varies based on (1) Compression format (2) Camera resolution (3) Camera frame rate and (4) Amount of activity / scene complexity in the camera's field of view (FOV)</li> <li>The innovi Remote Guarding benchmark was performed with a typical intrusion detection scene. Different scenes or quality settings may result in a higher/lower number of supported cameras</li> </ul> |  |                        |                      |                        |
| Agent Vi Part Number  |  |                        |                      |                        |
| EDG320  | innovi Edge compact appliance, Model 320 |                        |                      |                        |

### innovi Edge 325 for innovi Enterprise / innovi Investigation

| Number of Supported Cameras   |  |                        |                      |                        |
|---|--|------------------------|----------------------|------------------------|
| Compression Format / Resolution / FPS   | H.264 / 720P / 8 FPS                     | H.264 / 1080P / 30 FPS | H.265 / 720P / 8 FPS | H.265 / 1080P / 30 FPS |
| <b>Number of Cameras</b>  | <b>10</b>                                | <b>4</b>               | <b>7</b>             | <b>3</b>               |
| <ul style="list-style-type: none"> <li>The number of supported cameras for a given hardware configuration varies based on (1) Compression format (2) Camera resolution (3) Camera frame rate and (4) Amount of activity / scene complexity in the camera's field of view (FOV)</li> <li>The innovi Enterprise benchmark assumes a higher complexity scene than innovi Remote Guarding, with multiple objects moving in the field of view at any given time</li> </ul> |  |                        |                      |                        |
| Video Storage   |  |                        |                      |                        |
| 3 days per camera, with a maximum of 10 cameras   |  |                        |                      |                        |
| Agent Vi Part Number  |  |                        |                      |                        |
| EDG325  | innovi Edge compact appliance, Model 325 |                        |                      |                        |

## Additional Data for innoVi Remote Guarding / innoVi Enterprise / innoVi Investigation

### Bandwidth Considerations

**Average Required bandwidth per channel:**

- 5 kbps upload
- 0.5 kbps download

**Additional upload bandwidth:**

- Real-Time Event Detections: ~500 KB per event
- Live View in innoVi GUI: ~300 Kbps per camera

**Maximum allowed latency from the innoVi Edge to the cloud:**

- 2 seconds

### Supported Camera Characteristics

- Resolution: up to 4K
- Frame Rate: 8 FPS is the minimal supported frame rate
- Video stream width should be divisible by 4
- The current maximum allowed aspect ratio is 4:1

### Network Considerations

- Cameras connected to innoVi Edge must have static IP addresses (dynamic IP allocation may result in service discontinuity)
- The cameras network must allow outgoing HTTPS traffic through port 443

### Hardware

|                                |   |
|--------------------------------|---|
| <b>Network Ports</b>           | Gigabit Ethernet  |
| <b>Input Power</b>             | 100-240V  |
| <b>Power Supply</b>            | 65 Watt (External), power cord included   |
| <b>Dimensions &amp; Weight</b> | Size: 7.2 x 1.4 x 7 in / 182 x 36 x 178 mm. Weight: 2.6 lb / 1.18 kg                                |
| <b>Temperature</b>             | Operating temperature: 41° to 95° F (5° to 35° C)<br>Relative humidity: 20% to 80% (non-condensing) |

### Warranty

The warranty is provided by DELL.

You may check warranty status here: <https://www.dell.com/support/home/>. Enter the Service Tag # as appears on the sticker located on the side of the unit.

The tables above do not contain all features and functionalities of innoVi Edge, nor do they specify all design aspects that may affect or limit some of the features or functionalities. Additional information is available on Agent Vi's website, at [www.agentvi.com](http://www.agentvi.com), including innoVi Product Brochure and Agent Vi's extended documentation and manuals which are available to Agent Vi's partners only. For specific queries, please contact [sales@agentvi.com](mailto:sales@agentvi.com)

Agent Vi reserves the right to change the product specification at its sole discretion at any time. Agent Vi™, innoVi™, innoVi Edge™ and Vi™ are trade- marks of Agent Video Intelligence Ltd. © Agent Video Intelligence Ltd., All rights reserved.